

SOCKET STRIPS SS, SD, ESS, ESD & HSS SERIES

Mates with:
TS, TD, HTS, BBS,
BBD, BBL, BDL, BHS,

SPECIFICATIONS

For complete specifications
see www.samtec.com?SS,
www.samtec.com?ESS,
www.samtec.com?SD or
www.samtec.com?ESD

SS, SD, ESS, ESD

Insulator Material:
Black G.F. Polyester
Contact:

BeCu Shell:
Brass

except Style 5A
Phosphor Bronze
Current Rating: 1A

Plating:
Au over 50µ" (1,27µm) Ni or
Sn over 50µ" (1,27µm) Ni
Operating Temp Range:
-55°C to +125°C

Contact Resistance:
10 mΩ max

Insertion Force:
(Single contact only)

Standard=
9oz (2,50N) avg.,
16oz (4,45N) max

Low Insertion Force=
2.5oz (0,70N) avg.,
5.5oz (1,53N) max

Withdrawal Force:
(Single contact only)

Standard=
2.5oz (0,70N) avg.,
1.5oz (0,42N) min

Low Insertion Force=
2.0oz (0,56N) avg.,
0.35oz (0,10N) min

Insertion Depth:
(-03 thru -08, -1X & -21X, -5A)
(3,18mm) .125" to
(3,99mm) .157"

Insertion Depth: (-2, -22, -38)
(2,41mm) .095" to
(3,68mm) .145"

Insertion Depth: (-7)
(2,41mm) .095" to
(3,51mm) .138"

RoHS Compliant:
Yes

Lead-Free Solderable:
Wave only

SPECIFICATIONS

For complete specifications
see www.samtec.com?HSS

HSS

Same as SS except:
Insulator Material:
Black Liquid Crystal Polymer

Max Processing Temp:
230°C for 60 seconds, or
260°C for 20 seconds 3x with
all Au

Lead-Free Solderable:
Wave, or reflow with all Au

TYPE STRIP	1	NO. PINS PER ROW	PLATING OPTION	LEAD STYLE	OPTION	OTHER OPTION
------------	---	------------------	----------------	------------	--------	--------------

01 thru 32

= SS, ESS Series

01 thru 36

= HSS, SD & ESD Series

SS

= Standard Single
Row Socket


HSS

= High Temp Single
Row Socket

ESS

= Elevated Single Row Socket

Styles -5A & -03 thru -08 socket
heads not countersunk.




SD

= Standard Double
Row Socket

ESD

= Elevated Double
Row Socket

Style -5A not available.
Styles -5A & -03 thru -08 socket
heads not countersunk.



LIF= Low Insertion Force

Note:
Some lengths, styles and options are
non-standard, non-returnable.

-G

= 30µ" (0,76µm) Gold contact,
10µ" (0,25µm) Gold shell

-T

= 30µ" (0,76µm) Gold contact,
Tin shell

-S


= 10µ" (0,25µm) Gold contact,
Tin shell
(Styles 2 & 22 only)

-TT

= Tin contact and shell
(Styles 1, 2, 18 and 21 only)
(and 03 thru 08,
except LIF N/A)


-L = Locking Socket

Add -L suffix for locking
lead socket in end positions.
Requires Style -2 or -22 and
.035" ± .003 DIA board hole.



Requires -T Plating Option

-N
= Non
Flush




N/A Style -5A

ALSO AVAILABLE

Other lead styles available.
Request FactSheet.

-1A, -1B or -1C


For LIF specify -21A, -21B or -21C
(SS, HSS, SD)

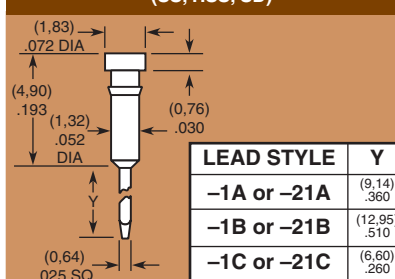

LEAD STYLE	Y
-1A or -21A	(9,14) .360
-1B or -21B	(12,95) .510
-1C or -21C	(6,60) .260

**-2, -22*, -5A,
-7 or -38***

*For LIF specify -22 or -38 (SS, HSS, SD)

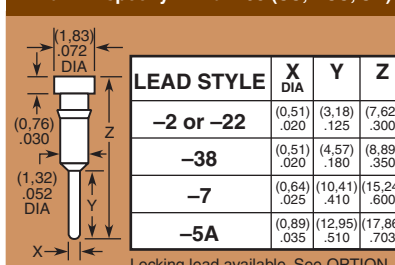


LEAD STYLE	X DIA	Y	Z
-2 or -22	(0,51) .020	(3,18) .125	(7,62) .300
-38	(0,51) .020	(4,57) .180	(8,89) .350
-7	(0,64) .025	(10,41) .410	(15,24) .600
-5A	(0,89) .035	(12,95) .510	(17,86) .703

Locking lead available. See OPTION.

**-03, -04, -05,
-06, -07, -08**

For LIF specify -23, -24,
-25, -26, -27, -28
(ESS, ESD)



LEAD STYLE	A	B	C
03 or 23	(11,51) .453	(8,38) .330	(3,12) .123
04 or 24	(14,05) .553	(10,92) .430	(3,12) .123
05 or 25	(17,86) .703	(13,46) .530	(4,39) .173
06 or 26	(14,05) .553	(8,38) .330	(5,66) .223
07 or 27	(17,86) .703	(10,92) .430	(6,93) .273
08 or 28	(17,86) .703	(8,38) .330	(9,47) .373

Due to technical progress, all designs, specifications and components are subject to change without notice.

WWW.SAMTEC.COM

SAMTEC USA • Tel: 1-800-SAMTEC-9 or 812-944-6733 • Fax: 812-948-5047

SAMTEC GERMANY • Tel: +49 (0) 89 / 89460-0 • Fax: +49 (0) 89 / 89460-299

SAMTEC NORDIC/BALTIC • Tel: +46-84477280 • Fax: +46-87420413

SAMTEC JAPAN • Tel: 045-475-1385 • Fax: 045-475-1340

SAMTEC KOREA • Tel: 82-31-717-5685 • Fax: 82-31-717-5681

SAMTEC SILICON VALLEY • Tel: 408-395-5900 • Fax: 408-395-1520

SAMTEC FRANCE • Tel: 01 60 95 06 60 • Fax: 01 60 95 06 61

SAMTEC CHINA • Tel: 86-21-61103766 • Fax: 86-21-5423 4575

SAMTEC SOUTH AFRICA • Tel: 27 11 452 8112 • Fax: 27 86 6714432

SAMTEC UK • Tel: 01236 739292 • Fax: 01236 727113

SAMTEC ITALY • Tel: 39 039 6890337 • Fax: 39 039 6890315

SAMTEC INDIA • Tel: +91-80-3272 1612 • Fax: +91-80-4152 8187

SAMTEC TAIWAN • Tel: 886-2-2735-6109 • Fax: 886-2-2735-5036

SAMTEC ANZ • Tel: 613 9512 7747 • Fax: 613 9512 7745