

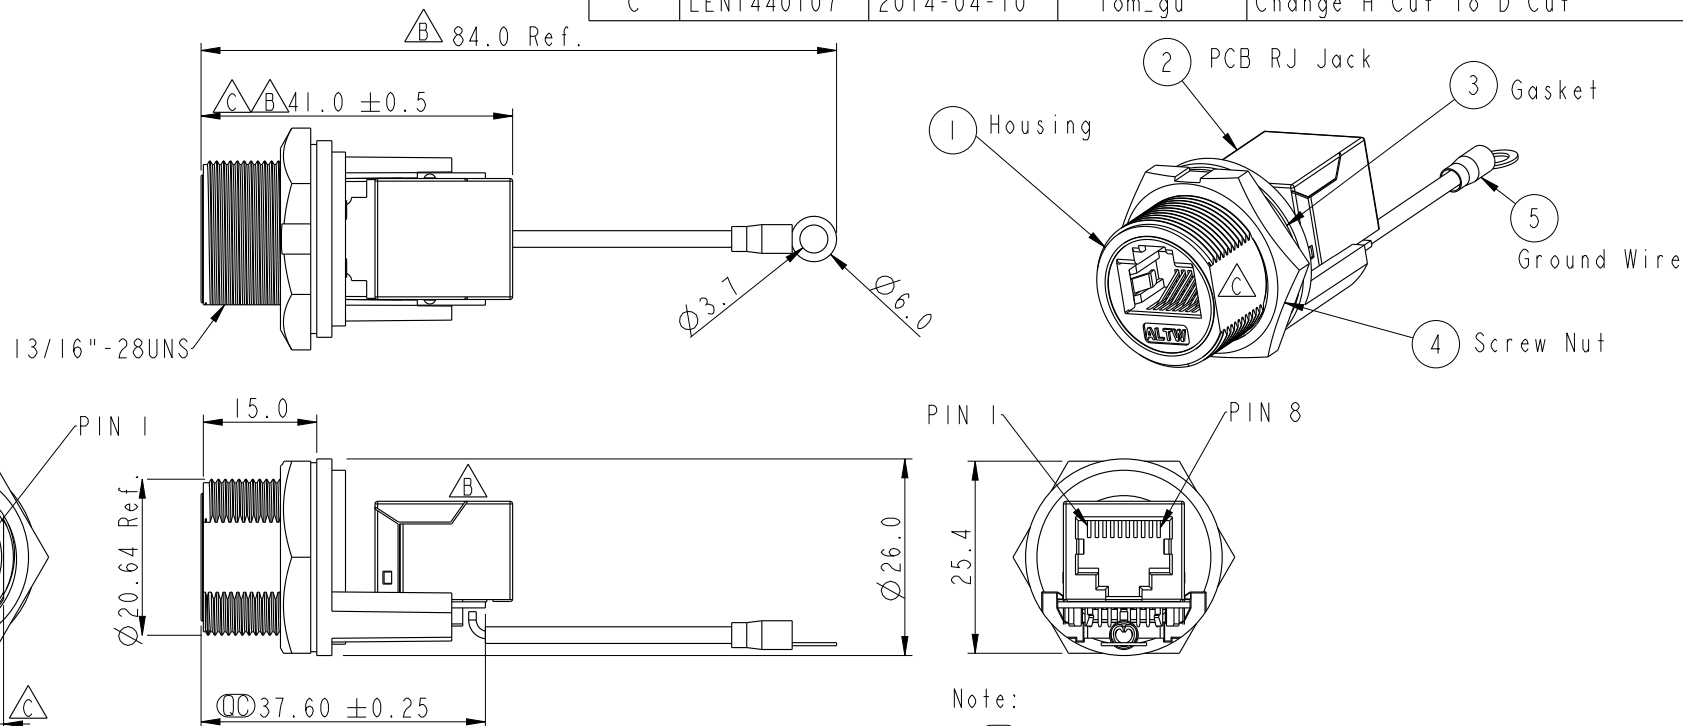


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LE313A0298	2013-09-07	Raison	Modify Jack,Note.Change H Cut
C	LEN1440107	2014-04-10	Tom_gu	Change H Cut To D Cut



Note:

- * $\varnothing$ Important Dimension
- * Waterproof Rate : IP67 Unmated
- * Housing : Nylon+GF,UL 94V-0,BLACK
- * Screw Nut : Nylon+GF,BLACK
- * $\triangle B$ Gasket : Silicone,UL 94V-0,Gray.
- * PCB: FR-4
- * Jack : PBT Polyester UL 94V-0
- * $\triangle C$ Ground Terminal:Brass,Tin Plated,Thickness:0.4mm
- * $\triangle B$ Use without Waterproof cap or Dust cap
For Panel Thickness Max: 4.2mm
- * Use with Waterproof cap or Dust cap
For Panel Thickness Max: 3.0mm
- * $\triangle B$ Screw torsion value range: 8~12kgf-cm



UNIT:mm			TITLE RJ45,C SIZE,UNMATED WATERPROOF ADD GROUND WIRE		
TOLERANCE	.X ±0.25		SCALE	1:1	SIZE A4
.XX ±0.1			SHEET	1	OF 1
.XXX ±0.05			REV.	C	WC-REV. B.4
ANGLES ±1°			$\varnothing$ Inspection item		

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	RCP-5SPFFH-SCU7002	DRAWN BY	Tom_gu	DATE	2014-04-10
DWG NO	RCP-5SPFFH-SCU7002	CHECKED BY	Tony	DATE	2014-04-10
CUSTOMER	ALTW	APPROVED BY	Victor	DATE	2014-04-10

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Amphenol:](#)

[RCP-5SPFFH-SCU7002](#)